

FISCHER




techsad[®]

M U L C H E R
T A G L I A E R B A
M O W E R



PRICELIST

MADE IN ITALY

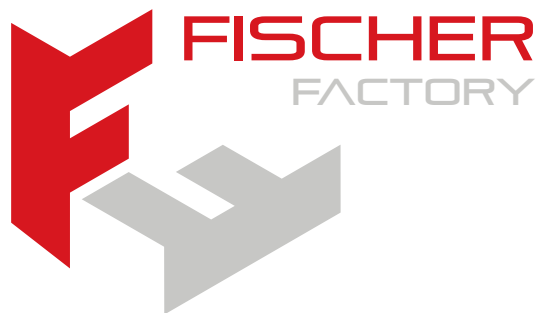

MASZYNY SADOWNICZE ARBORICULTURE MACHINERIES

Z.H.U. Techsad W.Jakubisiak Zofiówka 26, 05-620 Błędów
tel.+48 486680236 www.techsad.pl jakubisiak@techsad.pl

A SATISFIED CUSTOMER

IS OUR DAILY MISSION

Flexibility and variety together with quality and durability are trademarks of Fischer mowers. The continuous development and optimization of technologies led to national and global recognition of the Fischer "Know How" in viticulture and fruit growing, in the municipal and in the sports sector.

All Fischer mowers are produced individually and following our customer's requests with a tailored range of features. Day by day high quality mowing machines, which are also stable in value, are created by us and then used in a successful and sustainable way by our customers in over 55 countries.




FISCHER

THE MOWER.

BLADE MOWER SL




SL H

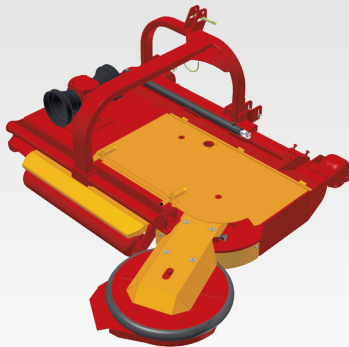


Rear mounting with hydraulic side shift

SL F

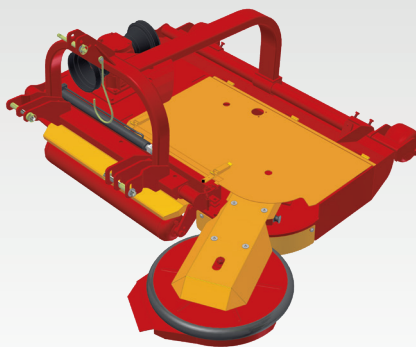


Front mounting with hydraulic side shift

SL FH

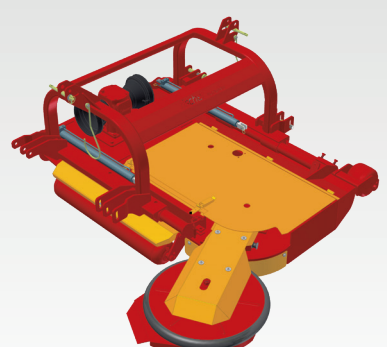


Front and rear mounting with hydraulic linear side shift

SL-T H

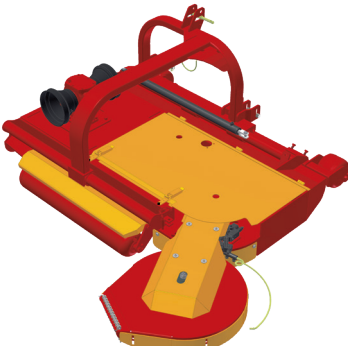


Rear mounting with hydraulic linear side shift and hydraulic precision sensor one side

SL-T F

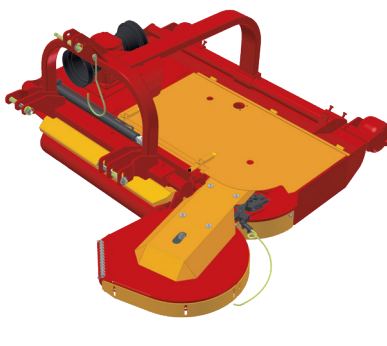

Front mounting with hydraulic linear side shift and hydraulic precision sensor one side


SL-T FH

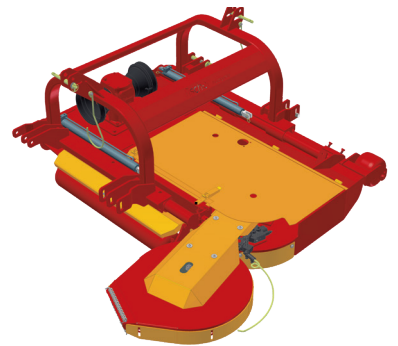

Front and rear mounting with hydraulic linear side shift and hydraulic precision sensor one side

SL HECK

REAR MOUNTING WITH HYDRAULIC
LINEAR SIDE SHIFT

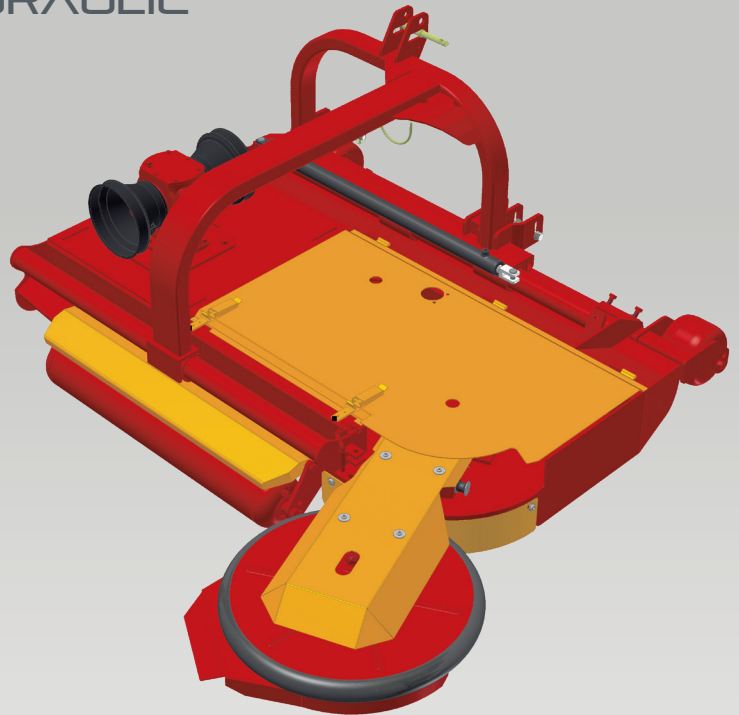

PRICES

SL2/125-170	6.018,00 €	SL3/230-280	7.266,00 €
SL2/140-190	6.208,00 €	SL3/250-300	7.903,00 €
SL2/160-210	6.393,00 €	SL4/270-320	8.538,00 €
SL3/180-230	6.923,00 €	SL4/310-360	8.725,00 €
SL3/200-250	7.080,00 €	SL4/360-410	9.037,00 €

STANDARD EQUIPMENT

For standard equipment on tractor needed

- 1 double acting control unit for hydraulic side shift

Standard equipment on the blade mower Fischer

- Rear mounting with hydraulic linear side shift one side
- Coshioned rotating swing wing disc 600 mm with spring-drawing attachment
- PTO 540/min. clockwise rotation seen in travel direction. Other combination on request (see page 127)
- Metal wheel and rollers height adjustable (4-7 cm)
- Mounted slide disc on the swing wings
- Fix blades on main frame and mobile blades on swing wing disc
- PTO drive shaft
- CE accident protection

EQUIPMENT


EWZ2101	One way cylinder for swing arm retraction (mechanically arm)	380,00 €
ESG2101	Electric valve double-acting 1 element with pressure relief valve	690,00 €
ESG2102	Electric valve double-acting 2 elements with pressure relief valve	905,00 €
RG2104	2 rotating rubber front wheel height adjustment 4-12 cm (>SL310)	839,00 €
RG2106	2 rubber back wheel assembly	605,00 €
KSV2101	Chain protection in front	390,00 €
MB2101	Extra for mobile blades on main frame (serial for SL- 250 & SL-360)	216,00 €
SD2101	Cushioned rotating swing wing 800 mm with spring-drawing attachment	910,00 €

Mod.						Outer dimensions						Cutting width		cm / °
				HP	KG	A	B	C	D	E	F	A	B	
SL2/125-170	2	2	2	40 - 90	390	131	148	93	30	178	206	121	170	55/71 04/130+60
SL2/140-190	2	2	2	40 - 90	420	141	152	93	30	199	210	147	193	68/72 01/142+60
SL2/160-210	2	2	2	40 - 90	450	172	159	93	30	220	217	166	214	82/80 12/150+60
SL3/180-230	3	3	2	40 - 90	490	198	148	93	30	239	204	192	234	91/90 01/180+60
SL3/200-250	3	3	2	40 - 90	520	215	123	93	30	260	210	209	254	90/111 00/201+60
SL3/230-280	3	3	2	40 - 90	550	245	159	93	30	293	217	239	287	96/138 06/228+60
SL3/250-300	3	3	2	40 - 90	580	258	163	93	30	309	221	252	302	96/153 06/243+60
SL4/270-320	4	4	2	40 - 90	600	279	152	93	30	324	210	273	318	135/130 045/220+60
SL4/310-360	4	4	2	40 - 90	660	320	159	93	30	369	217	314	363	158/152 068/242+60
SL4/360-410	4	4	2	40 - 90	750	368	173	93	30	423	234	361	415	182/187 092/277+60

*with the swinging disc D.800 the cutting width increase further 20cm

SL FRONT

FRONT MOUNTING WITH HYDRAULIC
LINEAR SIDE SHIFT

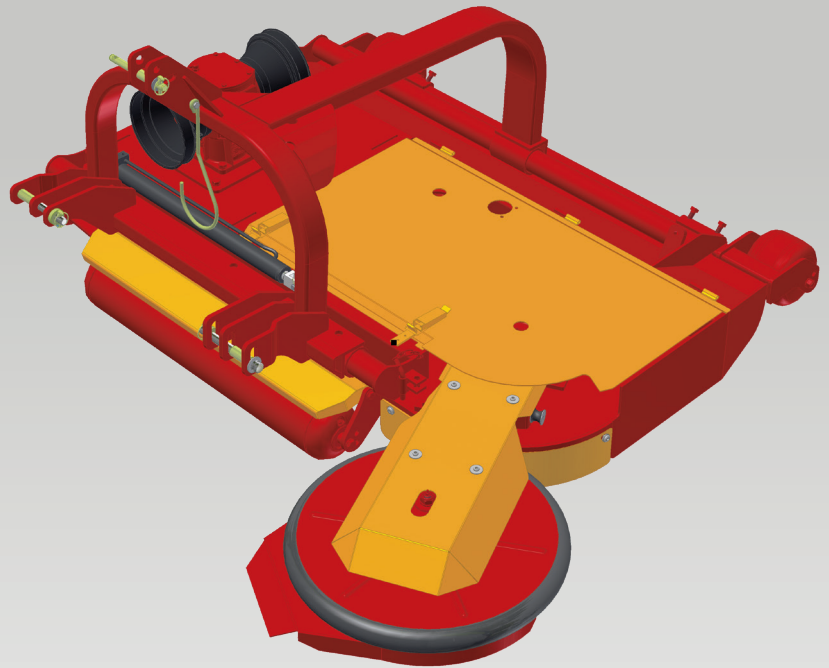

PRICES

SL2/125-170	6.497,00 €	SL3/230-280	7.710,00 €
SL2/140-190	6.656,00 €	SL3/250-300	8.345,00 €
SL2/160-210	6.810,00 €	SL4/270-320	8.981,00 €
SL3/180-230	7.366,00 €	SL4/310-360	9.167,00 €
SL3/200-250	7.522,00 €	SL4/360-410	9.480,00 €

STANDARD EQUIPMENT

For standard equipment on tractor needed

- 1 double acting control unit for hydraulic side shift

Standard equipment on the blade mower Fischer

- Front mounting with hydraulic linear side shift one side
- Coshioned rotating swing wing disc 600 mm with spring-drawing attachment
- PTO 540/min. clockwise rotation seen in travel direction. Other combination on request (see page 127)
- Metal wheel and rollers height adjustable (4-7 cm)
- Mounted slide disc on the swing wings
- Fix blades on main frame and mobile blades on swing wing disc
- PTO drive shaft
- CE accident protection

EQUIPMENT


EWZ2101	One way cylinder for swing arm retraction (mechanically arm)	380,00 €
ESG2101	Electric valve double-acting 1 element with pressure relief valve	690,00 €
ESG2102	Electric valve double-acting 2 elements with pressure relief valve	905,00 €
RG2104	2 rotating rubber front wheel height adjustment 4-12 cm (>SL310)	839,00 €
RG2106	2 rubber back wheel assembly	605,00 €
MB2101	Extra for mobile blades on main frame (serial for SL- 250 & SL-360)	216,00 €
KSV2101	Chain protection in front	390,00 €
SD2101	Cushioned rotating swing wing 800 mm with spring-drawing attachment	910,00 €

Mod.						Outer dimensions						Cutting width		 cm / Ø
				HP	KG	A	B	C	D	E	F	A	B	
SL2/125-170	2	2	2	40 - 90	512	131	163	101	30	178	206	121	170	5571 04130+60
SL2/140-190	2	2	2	40 - 90	527	141	167	101	30	199	210	147	193	6872 01142+60
SL2/160-210	2	2	2	40 - 90	569	172	174	101	30	220	217	166	214	8280 12150+60
SL3/180-230	3	3	2	40 - 90	608	198	163	101	30	239	204	192	234	9190 01180+60
SL3/200-250	3	3	2	40 - 90	641	215	137	98	30	260	210	209	254	90111 00201+60
SL3/230-280	3	3	2	40 - 90	705	245	174	98	30	293	217	239	287	96138 06228+60
SL3/250-300	3	3	2	40 - 90	749	258	178	98	30	309	221	252	302	96153 06243+60
SL4/270-320	4	4	2	40 - 90	768	279	167	98	30	324	210	273	318	135130 045220+60
SL4/310-360	4	4	2	40 - 90	848	320	174	98	30	369	217	314	363	158152 048242+60
SL4/360-410	4	4	2	40 - 90	969	368	188	98	30	423	234	361	415	182187 092277+60

*with the swinging disc D.800 the cutting width increase further 20cm

SL FRONT-HECK

FRONT- REAR MOUNTING WITH HYDRAULIC
LINEAR SIDE SHIFT

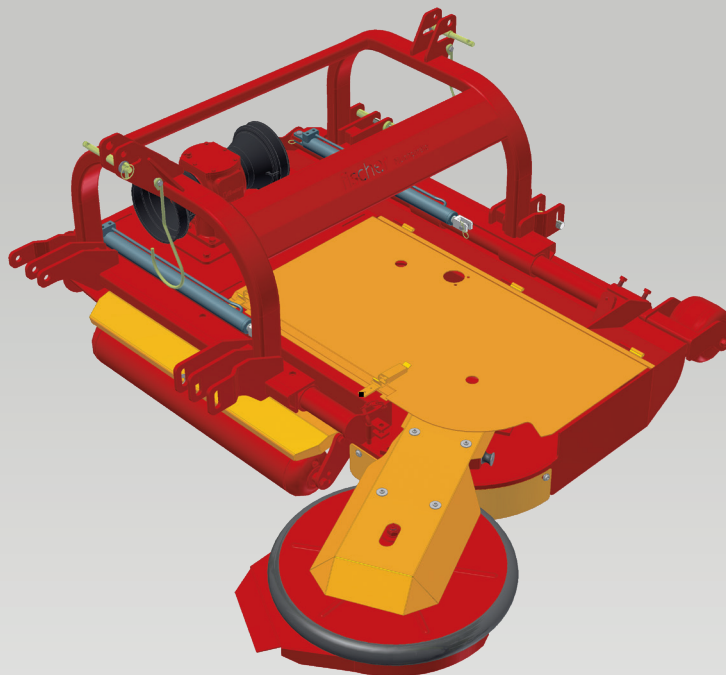

PRICES

SL2/125-170	7.238,00 €	SL3/230-280	8.450,00 €
SL2/140-190	7.397,00 €	SL3/250-300	9.085,00 €
SL2/160-210	7.550,00 €	SL4/270-320	9.722,00 €
SL3/180-230	8.106,00 €	SL4/310-360	9.908,00 €
SL3/200-250	8.262,00 €	SL4/360-410	10.219,00 €

STANDARD EQUIPMENT

For standard equipment on tractor needed



- 1 double acting control unit for hydraulic side shift

Standard equipment on the blade mower Fischer

- Front-rear mounting with 2 3-point and hydraulically linear side shift one side
- Coshioned rotating swing wing disc 600 mm with spring-drawing attachment
- PTO 540/min. clockwise rotation seen in travel direction. Other combination on request (see page 127)
- Metal wheel and rollers height adjustable (4-7 cm)
- Mounted slide disc on the swing wings
- Fix blades on main frame and mobile blades on swing wing disc
- Gear box with drive through shaft
- PTO drive shaft
- CE accident protection

EQUIPMENT


EWZ2101	One way cylinder for swing arm retraction (mechanically arm)	380,00 €
ESG2101	Electric valve double-acting 1 element with pressure relief valve	690,00 €
ESG2102	Electric valve double-acting 2 elements with pressure relief valve	905,00 €
RG2104	2 rotating rubber front wheel height adjustment 4-12 cm (>SL310)	839,00 €
RG2106	2 rubber back wheel assembly	605,00 €
KSV2101	Chain protection in front	390,00 €
MB2101	Extra for mobile blades on main frame (serial for SL- 250 & SL-360)	216,00 €
SD2101	Cushioned rotating swing wing 800 mm with spring-drawing attachment	910,00 €
DTG2101	Gear box with drive through shaft and double free wheel	398,00 €
GDZ2101	Gear box for PTO speed control-rear 540 rpm & front 1000 rpm	1.413,00 €
GW2100	PTO drive shaft for front and rear mounting	on request

Mod.						 Outer dimensions						 Cutting width		 cm / Ø
				HP	KG	A	B	C	D	E	F	A	B	
SL2/125-170	2	2	2	40 - 90	573	131	148	93	30	178	206	121	170	59 67 00 126+60
SL2/140-190	2	2	2	40 - 90	587	141	152	93	30	199	210	147	193	69 72 01 142+60
SL2/160-210	2	2	2	40 - 90	631	172	159	93	30	220	217	166	214	83 79 13 150+60
SL3/180-230	3	3	2	40 - 90	668	198	148	93	30	239	204	192	234	63 118 03 178+60
SL3/200-250	3	3	2	40 - 90	700	215	123	93	30	260	210	209	254	72 129 00 201+61
SL3/230-280	3	3	2	40 - 90	767	245	159	93	30	293	217	239	287	82 153 02 233+60
SL3/250-300	3	3	2	40 - 90	813	258	163	93	30	309	221	252	302	84 166 06 244+60
SL4/270-320	4	4	2	40 - 90	827	279	152	93	30	324	210	273	318	130 135 070 195+60
SL4/310-360	4	4	2	40 - 90	910	320	159	93	30	369	217	314	363	157 154 079 232+60
SL4/360-410	4	4	2	40 - 90	1073	368	173	93	30	423	234	361	415	179 190 100 268+60

*with the swinging disc D.800 the cutting width increase further 20cm

SL-T HECK

HYDRAULIC LINEAR SIDE SHIFT WITH HYDRAULIC
PRECISION SENSOR ONE SIDE

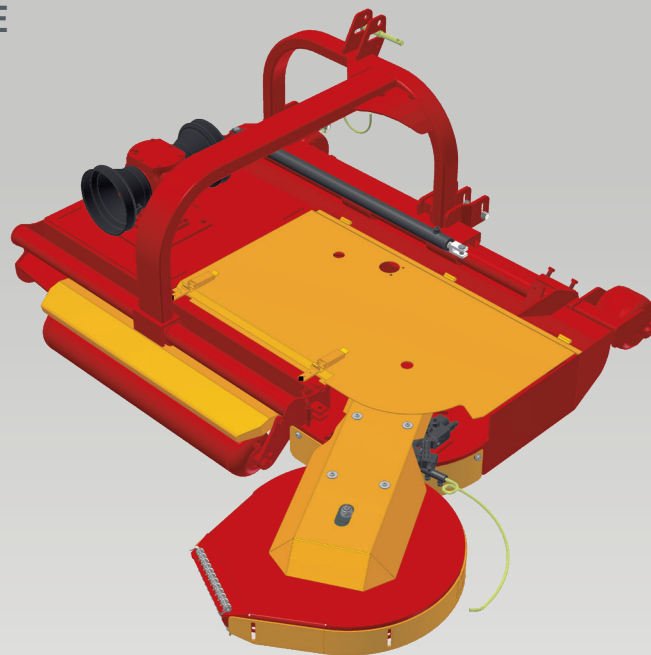

PRICES

SL2/125-170	8.472,00 €	SL3/230-280	9.683,00 €
SL2/140-190	8.630,00 €	SL3/250-300	10.318,00 €
SL2/160-210	8.785,00 €	SL4/270-320	10.953,00 €
SL3/180-230	9.339,00 €	SL4/310-360	11.141,00 €
SL3/200-250	9.497,00 €	SL4/360-410	11.452,00 €

STANDARD EQUIPMENT

For standard equipment on tractor needed

- 1 double acting control unit for hydraulic side shift

Standard equipment on the blade mower Fischer

- Front-rear mounting with 2 3-point and hydraulically linear side shift one side
- Self supply pump and tank (18 l/min)
- Quantity controller
- Interrow disc 600 mm with hydraulic precision sensor
- PTO 540/min. clockwise rotation seen in travel direction. Other combination on request (see page 127)
- Metal wheel and rollers height adjustable (4-7 cm)
- Mounted slide disc on the swing wings
- Fix blades on main frame and mobile blades on swing wing disc
- PTO drive shaft
- CE accident protection

EQUIPMENT


HSP2101	Hydraulic swing wing arm positioning for precision sensor	380,00 €
UEV2101	Pressure relief valve for pump reserve motion	180,00 €
EV4/2101	Electric valve 4-ways	512,00 €
ESG2101	Electric valve double-acting 1 element with pressure relief valve	690,00 €
ESG2102	Electric valve double-acting 2 elements with pressure relief valve	905,00 €
RG2104	2 rotating rubber front wheel height adjustment 4-12 cm (>SL310)	839,00 €
RG2106	2 rubber back wheel assembly	605,00 €
KSV2101	Chain protection in front	390,00 €
SFA2101	Extra for fix disc 800 with precision sensor on swing arm	873,00 €
MB2101	Extra for mobile blades on main frame (serial for SL- 250 & SL-360)	216,00 €

Mod.				HP	KG	Outer dimensions						Cutting width		cm / °
						A	B	C	D	E	F	A	B	
SL2/125-170	2	2	2	40 - 90	566	131	148	93	30	178	206	121	170	55/71 04/130+60
SL2/140-190	2	2	2	40 - 90	581	141	152	93	30	199	210	147	193	68/72 01/142+60
SL2/160-210	2	2	2	40 - 90	628	172	159	93	30	220	217	166	214	82/80 12/150+60
SL3/180-230	3	3	2	40 - 90	663	198	148	93	30	239	204	192	234	91/90 01/180+60
SL3/200-250	3	3	2	40 - 90	696	215	123	93	30	260	210	209	254	90/111 00/201+60
SL3/230-280	3	3	2	40 - 90	759	245	159	93	30	293	217	239	287	96/138 06/228+60
SL3/250-300	3	3	2	40 - 90	801	258	163	93	30	309	221	252	302	96/153 06/243+60
SL4/270-320	4	4	2	40 - 90	823	279	152	93	30	324	210	273	318	135/130 045/220+60
SL4/310-360	4	4	2	40 - 90	902	320	159	93	30	369	217	314	363	158/152 068/242+60
SL4/360-410	4	4	2	40 - 90	1061	368	173	93	30	423	234	361	415	182/187 092/277+60

*with the swinging disc D.800 the cutting width increase further 20cm

SL-T FRONT

HYDRAULIC LINEAR SIDE SHIFT WITH HYDRAULIC
PRECISION SENSOR ONE SIDE

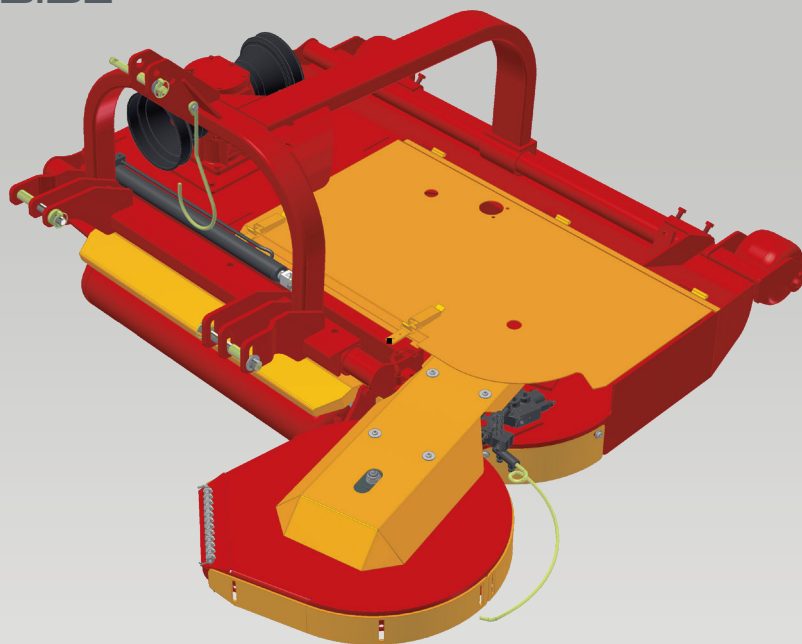

PRICES

SL2/125-170	8.914,00 €	SL3/230-280	10.126,00 €
SL2/140-190	9.074,00 €	SL3/250-300	10.760,00 €
SL2/160-210	9.227,00 €	SL4/270-320	11.396,00 €
SL3/180-230	9.782,00 €	SL4/310-360	11.583,00 €
SL3/200-250	9.939,00 €	SL4/360-410	11.895,00 €

STANDARD EQUIPMENT

For standard equipment on tractor needed

- 1 double acting control unit for hydraulic side shift

Standard equipment on the blade mower Fischer

- Front mounting with hydraulic linear side shift one side
- Self supply pump and tank (18 l/min)
- Quantity controller
- Interrow disc 600 mm with hydraulic precision sensor
- PTO 540/min. clockwise rotation seen in travel direction. Other combination on request (see page 127)
- Metal wheel and rollers height adjustable (4-7 cm)
- Mounted slide disc on the swing wings
- Fix blades on main frame and mobile blades on swing wing disc
- PTO drive shaft
- CE accident protection

EQUIPMENT


HSP2101	Hydraulic swing wing arm positioning for precision sensor	380,00 €
UEV2101	Pressure relief valve for pump reserve motion	180,00 €
EV4/2101	Electric valve 4-ways	512,00 €
ESG2101	Electric valve double-acting 1 element with pressure relief valve	690,00 €
ESG2102	Electric valve double-acting 2 elements with pressure relief valve	905,00 €
RG2104	2 rotating rubber front wheel height adjustment 4-12 cm (>SL310)	839,00 €
RG2106	2 rubber back wheel assembly	605,00 €
SFA2101	Extra for fix disc 800 with precision sensor on swing arm	873,00 €
MB2101	Extra for mobile blades on main frame (serial for SL- 250 & SL-360)	216,00 €
KSV2101	Chain protection in front	390,00 €

Mod.				HP	KG	Outer dimensions						Cutting width		cm / °
						A	B	C	D	E	F	A	B	
SL2/125-170	2	2	2	40 - 90	576	131	163	101	30	178	206	121	170	59/67 00/126+60
SL2/140-190	2	2	2	40 - 90	590	141	167	101	30	199	210	147	193	69/72 01/142+60
SL2/160-210	2	2	2	40 - 90	632	172	174	101	30	220	217	166	214	83/79 13/150+60
SL3/180-230	3	3	2	40 - 90	672	198	163	101	30	239	204	192	234	43/118 03/178+60
SL3/200-250	3	3	2	40 - 90	704	215	137	98	30	260	210	209	254	72/129 00/201+61
SL3/230-280	3	3	2	40 - 90	769	245	174	98	30	293	217	239	287	82/153 02/233+60
SL3/250-300	3	3	2	40 - 90	811	258	178	98	30	309	221	252	302	84/166 06/244+60
SL4/270-320	4	4	2	40 - 90	831	279	167	98	30	324	210	273	318	130/135 070/195+60
SL4/310-360	4	4	2	40 - 90	912	320	174	98	30	369	217	314	363	157/154 079/232+60
SL4/360-410	4	4	2	40 - 90	1032	368	188	98	30	423	234	361	415	179/190 100/268+60

*with the swinging disc D.800 the cutting width increase further 20cm

SL-T FRONT-HECK

HYDRAULIC LINEAR SIDE SHIFT WITH HYDRAULIC
PRECISION SENSOR ONE SIDE

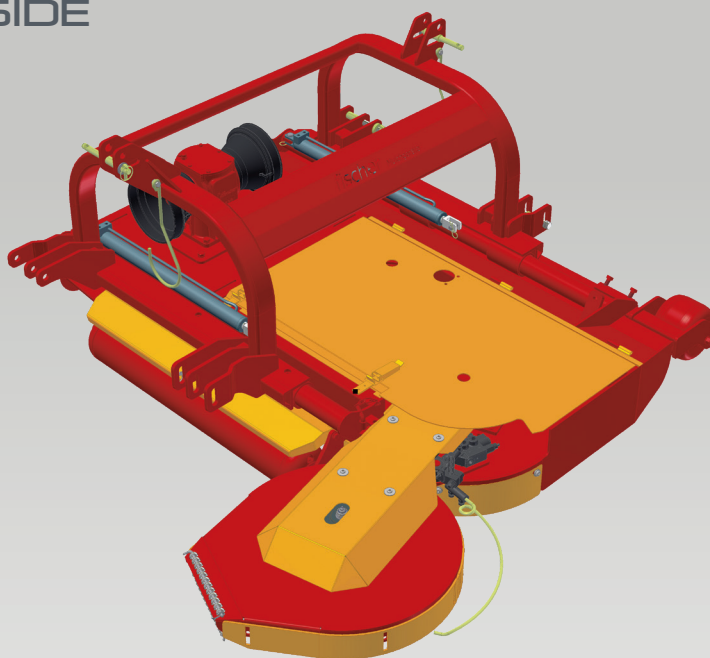

PRICES

SL2/125-170	9.655,00 €	SL3/230-280	10.867,00 €
SL2/140-190	9.814,00 €	SL3/250-300	11.501,00 €
SL2/160-210	9.967,00 €	SL4/270-320	12.138,00 €
SL3/180-230	10.523,00 €	SL4/310-360	12.323,00 €
SL3/200-250	10.680,00 €	SL4/360-410	12.636,00 €

STANDARD EQUIPMENT

For standard equipment on tractor needed



- 1 double acting control unit for hydraulic side shift

Standard equipment on the blade mower Fischer

- Front-rear mounting with 2 3-point and hydraulically linear side shift one side
- Self supply pump and tank (18 l/min)
- Quantity controller
- Interrow disc 600 mm with hydraulic precision sensor
- PTO 540/min. clockwise rotation seen in travel direction. Other combination on request (see page 127)
- Metal wheel and rollers height adjustable (4-7 cm)
- Mounted slide disc on the swing wings
- Fix blades on main frame and mobile blades on swing wing disc
- Gear box with drive through shaft
- PTO drive shaft
- CE accident protection

EQUIPMENT


HSP2101	Hydraulic swing wing arm positioning for precision sensor	380,00 €
UEV2101	Pressure relief valve for pump reserve motion	180,00 €
EV4/2101	Electric valve 4-ways	512,00 €
ESG2101	Electric valve double-acting 1 element with pressure relief valve	690,00 €
ESG2102	Electric valve double-acting 2 elements with pressure relief valve	905,00 €
RG2104	2 rotating rubber front wheel height adjustment 4-12 cm (>SL310)	839,00 €
RG2106	2 rubber back wheel assembly	605,00 €
KSV2101	Chain protection in front	390,00 €
SFA2101	Extra for fix disc 800 with precision sensor on swing arm	873,00 €
MB2101	Extra for mobile blades on main frame (serial for SL- 250 & SL-360)	216,00 €
DTG2101	Gear box with drive through shaft and double free wheel	398,00 €
GDZ2101	Gear box for PTO speed control-rear 540 rpm & front 1000 rpm	1.413,00 €
GW2100	PTO drive shaft for front and rear mounting	on request

Mod.						 Outer dimensions						 Cutting width		 cm / °
				HP	KG	A	B	C	D	E	F	A	B	
SL2/125-170	2	2	2	40 - 90	637	131	148	93	30	178	206	121	170	59167 00126+60
SL2/140-190	2	2	2	40 - 90	650	141	152	93	30	199	210	147	193	6972 01142+60
SL2/160-210	2	2	2	40 - 90	694	172	159	93	30	220	217	166	214	8379 13150+60
SL3/180-230	3	3	2	40 - 90	732	198	148	93	30	239	204	192	234	63118 03178+60
SL3/200-250	3	3	2	40 - 90	763	215	123	93	30	260	210	209	254	72129 00201+61
SL3/230-280	3	3	2	40 - 90	830	245	159	93	30	293	217	239	287	82153 02233+60
SL3/250-300	3	3	2	40 - 90	875	258	163	93	30	309	221	252	302	84166 06244+60
SL4/270-320	4	4	2	40 - 90	890	279	152	93	30	324	210	273	318	130135 070195+60
SL4/310-360	4	4	2	40 - 90	973	320	159	93	30	369	217	314	363	157154 079232+60
SL4/360-410	4	4	2	40 - 90	1190	368	173	93	30	423	234	361	415	179190 100268+60

*with the swinging disc D.800 the cutting width increase further 20cm

EQUIPMENT

KSV2101



RG2104




RG2102




RG2106




MB2101



SD802101



SFA2101




EWZ2101




HSP2101




DTG2101




ESG2101



ESG2102




EV42101



GW2100




G2101



UEV2101



NOTES

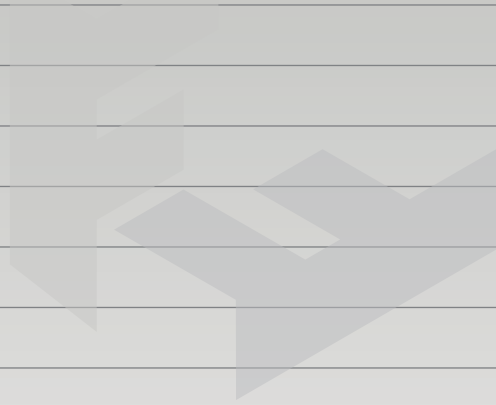

OUR
CUSTOMER
SATISFACTION

SPEAKS FOR ITSELF

techsad



MASZYNY SADOWNICZE

ARBORICULTURE MACHINERIES

Z.H.U. Techsad W.Jakubisiak

Zofiówka 26, 05-620 Błędów

tel.+48 486680236 www.techsad.pl jakubisiak@techsad.pl



WWW.FISCHER-FACTORY.COM

FISCHER



techsad[®]

M U L C H E R
T A G L I A E R B A
M O W E R

2021